




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B41F 7/26, 23/08	A1	(11) International Publication Number: WO 99/01282 (43) International Publication Date: 14 January 1999 (14.01.99)
(21) International Application Number: PCT/DK98/00303 (22) International Filing Date: 2 July 1998 (02.07.98) (30) Priority Data: 0800/97 3 July 1997 (03.07.97) DK (71) Applicant (for all designated States except US): TRESU A/S [DK/DK]; Eegsvej 14-16, DK-6091 Bjert (DK). (72) Inventor; and (75) Inventor/Applicant (for US only): LEIMAND, Henrik [DK/DK]; Engdragnet 18, DK-6091 Bjert (DK). (74) Agent: PATRADE A/S; Store Torv 1, DK-8000 Århus C (DK).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Danish).</i>

(54) Title: METHOD OF OPERATION OF A PRINTING UNIT AND PRINTING UNIT FOR OFFSET MACHINE

(57) Abstract

There is disclosed a printing unit (1) for use in an offset machine. The printing unit allows a broader use of offset machines (1). This is achieved in that the lacquer application means and the water application means comprise a unit (28) consisting of a doctor blade chamber device (30) and at least one roller (29, 32) for transferring lacquer or water from the doctor blade chamber device (30) to the plate cylinder (15) of the printing unit.

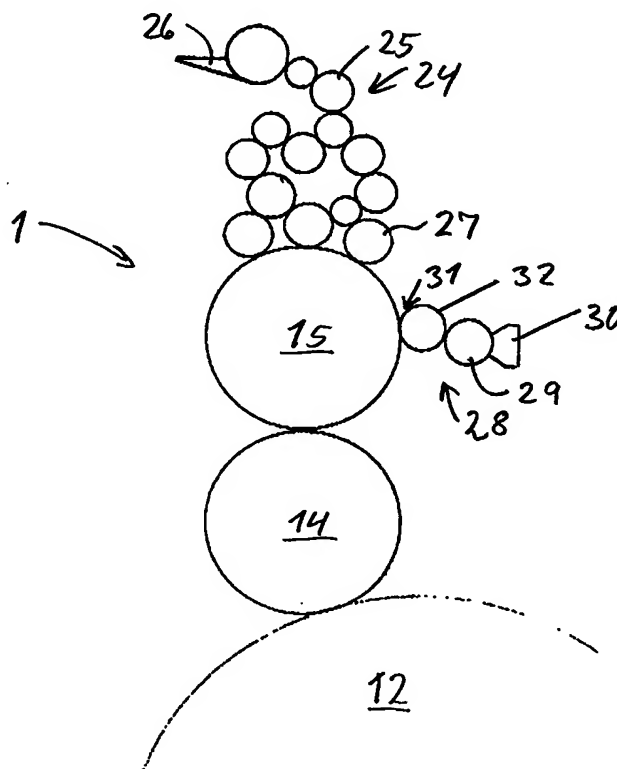

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD OF OPERATION OF A PRINTING UNIT AND PRINTING UNIT FOR OFFSET MACHINE

The present invention relates to a method of operation of a printing unit and a printing
5 unit for use in an offset machine comprising lacquer application means and water application means.

Offset machines are known in the art and therefore will only be briefly explained. A web or a sheet to be printed is passed between printing rollers or transfer rollers. The
10 web or the sheets are made to abut on a blanket cylinder for application of the print to be applied in the individual printing unit in the offset machine. The blanket cylinder is in contact with a plate cylinder which transfers the colour print which is to be placed on the web. The plate cylinder is in contact with dampening unit and an inking unit applying damp and ink, respectively. Thus, an offset plate on the plate cylinder will be
15 rotated whereby water receptive parts are dampened by the rollers of the dampening unit. Then the ink receptive parts of the offset plate are provided with ink from the inking rollers in the inking unit. The formed image is then applied to the blanket cylinder which in turn applies the ink onto the web or the sheet. Preferably a paper web is used, but other materials may also be used for printing.

20 A printing unit according to the present invention may be used in a traditional offset machine, for example of the type disclosed in EP 767.058. The contents of this patent application is hereby incorporated by reference, as the printing unit may form a part of an offset machine constructed according to the same principle and with the same sheet
25 feeder and sheet delivery means at the beginning and the end of the printing unit, just like there may be used similar means for transferring paper web or sheets between different, consecutive printing units to apply the finished image to the web. Likewise, the same type of printing ink may be employed. Offset machines may be equipped with a lacquering unit. The lacquering unit will typically be constructed with a plate
30 cylinder onto which the lacquer is applied from a roller arrangement which is supplied from a pan with clear lacquer.

It is the object of the present invention to provide a method of operation of a printing unit and a printing unit for an offset machine allowing a broader use and a more effective operation of printing units in existing offset machines. Furthermore, it is an object to provide a printing unit which simultaneously may be used for application of lacquer and ink in the same printing unit.

According to the present invention this is achieved with a method characterised in that the printing unit comprising a doctor blade chamber device is used for lacquer application and as a dampening unit for water application.

The printing unit for use by the method is characterised in that the lacquer application means and the water application means are comprised of a unit comprising a doctor blade chamber device and at least a roller for transferring lacquer or water from the doctor blade chamber device to the plate cylinder of the printing unit.

By using such a method and such a unit, it becomes possible to modify existing offset machines such that they find a broader use and simultaneously the process may run faster. The amount of ink or damp located in the holes on the transfer roller will be transferred to the plate cylinder either directly or via a rubber roller.

It will be possible to use separate doctor blade chamber devices for lacquer application or water application. However, it will also be possible to use one and the same doctor blade chamber device for lacquer or water application.

In a lacquering unit, which typically will be the last printing unit in an offset machine, it is advantageous that the lacquer application means comprises only one screen roller in the form of an anilox roller for transferring the lacquer applied directly from the doctor blade chamber device to the plate cylinder. This construction may be further developed. According to a special embodiment, most printing units will be provided with a support for supporting a cleaning system comprised of a liquid spraying nozzle and wiping paper. This system may be detachably mounted on the support. According to an advantageous embodiment, this support may also be used for supporting the lac-

quer application means in the form of the doctor blade chamber device and the screen roller. In such a situation, the screen roller will preferably be driven by its own motor, preferably a tacho motor. Thus, the coupling means located in the frame of the offset machine can be reused as coupling means for the unit according to the invention.

5

The motor which is being used to drive the screen roller is an independent motor in order to be able to adjust the number of revolutions for different offset machines. Thus, the unit does not require a special adjustment of the drive of the screen rollers for different offset machines. In the machine, all that is required is a suspension which in its most simple form comprises four pins or screws on a support.

10

By use of a unit according to the invention based on a doctor blade chamber device, it will be possible to apply strongly pigmented inks, as for example metal lacquer. This will not be possible with conventional printing units, as pigments/inks will clot and make quality printing impossible.

15

The unit according to the invention may also be used as a dampening unit. In the known dampening units an environmental problem arises. To transfer the dampening water with the present roller arrangement, it is necessary to add solvents. At present, this has been prohibited in several places.

20

Alternatively, attempts have been made to solve the problem by using Teflon coating to form a sort of mask so as to avoid ink setoff in certain areas. This is known as dry offset and, in principle, is a different process. Thus, Teflon may be used to replace water application from the dampening rollers. This system has an advantage as the paper is not dampened and so there is no risk of poor attachment of lacquer.

25

Instead of using the traditional dampening units, according to the present invention a system comprising a doctor blade chamber device and a transfer roller may be used. According to a preferred embodiment, a screen roller and a rubber roller are used between the doctor blade chamber device and a plate cylinder. This is advantageous as it allows a faster printing than previously. The amount of water or the water bead which

30

is being formed in a wedge-shaped space between the rubber roller and the plate cylinder can be varied by operating at varying speeds between the rubber roller and the plate cylinder. By operating the rubber roller at a greater speed, it is thus possible to provide a greater amount of water in the wedge. The amount of water can also be adjusted by varying the clearance of the rubber roller and the plate cylinder. The printing unit according to the invention is thus advantageous in that the amount of water located in the clearance may be varied according to need.

As a printing unit is intended either for lacquer or as dampening unit, it will be possible to use same unit comprising a doctor blade chamber device and transfer roller for both water and for lacquer.

If the plate cylinder is provided with rubber blanket, it will be possible to place cardboard under the blanket wherein a so-called window is made, i.e. an area which is cut out. Hereby, no print is made in this area. This provides the possibility of the finished image being provided with a blank space in this area, for example for a bar code or for adhesive.

By use of a conventional dampening unit, it will not be possible to apply lacquer. Because of the surface rates, there will be a substantial and unacceptable pollution of the surroundings as lacquer will splash from the periphery of the roller and from the ends of the rollers. By using the unit according to the invention as dampening unit, it will be possible to avoid pollution.

It will also be possible that two units according to the invention are provided together with the plate cylinder, of which the one unit is used for lacquer application and the other for water application. Hereby it will be possible to provide lacquer stripes and ink stripes side by side on the plate cylinder. This is made possible as doctor blade chamber devices can be divided to supply liquid/ink over a part of their length. Thus, hereby is achieved the possibility of making prints with entirely new effects.

In traditional offset machines more printing units will usually be provided. There have been a growing need and a desire to be able to employ lacquer application on the formed colour prints. Lacquer application is used as a final layer providing a lacquer layer atop the formed colour print. This lacquer application yields a better quality and a greater depth in the formed print. If it is desired to be able to apply lacquer, it has been necessary to supplement the traditional offset machines with an extra lacquering unit. The lacquering unit normally has a structure which is comparable to that of a dampening unit. This means that the lacquering unit transfers lacquer from a lacquer reservoir via a roller arrangement and a contact roller which abuts on the plate cylinder.

With the present invention it is possible to modify one or all of the desired printing units. The one or all the printing units which are not rebuilt are used for offset-printing. It is, for example, possible to modify an existing offset machine with four printing units. This may take place by modifying the last printing unit in the operating direction of the machine. The three preceding printing units then use the primary colours to make of the desired colour print. In the one or all of the modified printing units, the offset inking unit is detached from the plate cylinder. Then the dampening unit is replaced by a unit comprising a doctor blade chamber device and a screen roller which is moved into engagement with the plate cylinder. In this system, the plate cylinder will be provided with a rubber blanket which is in contact with the hard screen roller. If, at a later time, it is desired not to use lacquer application, it will be possible to demount the unit comprising the screen roller and the doctor blade chamber device and re-mount the rollers of the dampening unit.

If frequent changes are required, it will be possible to place the dampening unit and a unit comprising the screen roller/doctor blade chamber device on a slide system such that these two systems optionally may be moved into and out of engagement with the plate cylinder. By the conversion from lacquer operation to conventional inking operation and vice versa in such a printing unit, it will thus be necessary to exchange the plate on the plate cylinder as a rubber blanket is used when the lacquering unit is in

engagement, whereas conventionally a metal plate is used when the dampening unit and the inking unit are in engagement with the plate cylinder.

The invention will now be described in detail with reference to the accompanying schematic drawing, in which

Fig. 1 shows a side view of a typical offset machine comprising four printing units,

Fig. 2 shows a partial view illustrating a known printing unit comprising a dampening unit and an inking unit,

10 Fig. 3 shows a view corresponding to Fig. 2 illustrating a first embodiment of a printing unit according to the invention,

Fig. 4 shows a view corresponding to Fig. 2 illustrating a second embodiment of an printing unit according to the invention,

Fig. 5 shows an example of a known arrangement in a printing unit,

15 Fig. 6 shows a view corresponding to Fig. 5 illustrating a further embodiment of a printing unit according to the invention, and

Fig. 7 shows a view illustrating a further embodiment of a printing unit according to the invention.

20 Fig. 1 shows a traditional offset printing machine 1 comprising four printing units 2. The machine has a transport direction 3 for sheets being printed. The sheets come from a feeder station 4 and is transferred to a delivery station 5 by means of a feeder arrangement 6 comprising a conveyor belt 7. The conveyor belt 7 extends around two rollers 8,9. The individual sheets are transferred from the unit 4 via a track 10 around
25 an impression cylinder 12. The individual sheets are placed at a position indicated by 13. Thus, the sheets are placed in an area between a blanket cylinder 14 and an impression cylinder 12. The blanket cylinder 14 is in contact with a plate cylinder 15. Apart from the impression cylinders 12, the offset machine also comprises transfer cylinders 16 for the sheets.

30

Furthermore, the offset machine comprises gripper means for holding the sheets and a plurality of rollers for dampening units and inking units which are connected to the

plate cylinder. As these are well known, they are not shown in Fig. 1 which serves to illustrate the construction of the offset unit. However, these rollers are shown in Fig. 2.

Fig. 2 shows a printing unit 1 comprising an impression cylinder 12, a blanket cylinder 14 and a plate cylinder 15. These cylinders rotate according to the arrows 17,18,19. A dampening unit comprises a container 21 for water. From the water container 21 the water is led via a system of rollers 22 to the last contact roller 23 abutting on the plate cylinder 15. Furthermore, the printing unit 1 comprises an inking unit 24 comprising a number of rollers 25 which transfer ink from an ink fountain 26 to contact rollers 27 applying the ink to a plate (not shown) located on the plate cylinder 15. Thus, the plate which is located on the plate cylinder will be supplied with ink in the areas to which no water has been applied from the dampening unit 20. The plate will usually be an etched metal plate.

As an inking unit, in principle, is constructed like the dampening unit 20, Fig. 2 can also be said to illustrate an inking unit. Thus, the ink will be fed from the container 22 containing lacquer and be transferred via rollers 22 to the last contact roller 23 also called the forme inking roller.

The shown embodiment possesses certain environmental and technical disadvantages. Instead of using the existing dampening unit, the printing unit shown in Fig. 2 can be modified as illustrated in Fig. 3.

In Fig. 3 the contact roller 23 is replaced by a unit 28 comprising a screen roller 29, preferably an anilox roller, of the kind used in flexographic printing. The screen roller 29 may be mounted directly in the existing suspension. On the screen roller 29, a doctor blade chamber device 30 is mounted. Even at large peripheral rates, the unit 28 can ensure a constant and uniform amount of water and/or lacquer being transferred to the plate cylinder 15. If it is desired to use the unit 28 for lacquer application, the rollers 27 of the inking unit are moved out of engagement with the plate cylinder 15. If the unit 28 is used for water application, the inking unit 24 is maintained in engagement with the plate cylinder 15.

In the shown embodiment, the use of the hard screen roller 29 will necessitate the use of a rubber blanket on the plate cylinder 15.

5 The shown printing unit will be very simple and easy to maintain. Simultaneously, the system will be easy to convert depending on whether it is desired to use the printing unit for one purpose or the other. Thus, according to ones wishes, it will be possible to use the existing dampening unit concurrently with the unit 28 according to the invention.

10 When the unit 28 is used for water application, it will be easy to adjust the amount of water in a simple manner. Such an adjustment of the amount of water is difficult in traditional dampening units where the rollers run synchronously with the plate cylinder 15. The screen roller 29 may be provided with its own motor driven independently of the plate cylinder. This provides the possibility of a differentiated peripheral rate and thereby the possibility of damming up larger or smaller amounts of water in the wedge-shaped space 31 formed between the screen roller 29 and the plate cylinder 15.

15 In Fig. 4, there is shown a further embodiment of a printing unit 1 according to the invention. Fig. 4 differs from the printing unit shown in Fig. 3 in that between the unit 28 there is placed a further roller, viz. a rubber roller 32. By using a dampening unit constructed according to this principle, the dampening water will be transferred to the plate cylinder 15 from the doctor blade chamber device 30 via the screen roller 29 to the rubber roller 32 which will apply the dampening medium/water onto the plate cylinder 15. This arrangement is particularly advantageous with the opportunity for speed variation. Thus, the peripheral rate in this embodiment may easily be varied relative to the peripheral rate on the plate cylinder with regard to varying the damp supply according to wish. In the embodiment shown in Fig. 4, the plate cylinder 15 can be used with a traditional metal plate whereto the ink is applied in the inking unit 24.

20 25 30 In Fig. 5 there is shown a known cleaning arrangement 33 to be used for a plate cylinder 15. The cleaning arrangement 33 comprises a liquid nozzle 34 which sprays a liq-

uid onto the plate cylinder and onto a wiping belt 35 extending around the roller 35'. The rollers 35' and the nozzle 34 are mounted on a support 36. The support 36 is mounted on pins 37 fastened to the frame 38 of the offset machine.

5 The arrangement 33 may be secured to the pins 37 by bolts or in another way. However, the arrangement is detachable from these pins. Thus, it will be possible to replace the shown arrangement by a unit illustrated in Fig. 6 and comprising a doctor blade chamber device 30 and a screen roller 29. The unit 28 is mounted on a supporting frame 39. The supporting frame 39 is mounted on the frame 38 of the machine via
10 the pins 37. Thus, it is easy to substitute the unit 28 for the device 33.

The roller 29 is driven by its own motor 40 by means of a belt connection or another suitable transmission connection. The motor 40 is preferably a tacho motor, such that the rotational speed can be set according to wish and adjusted to the rotational speed
15 of the plate roller 15. The unit 28 is pivotally mounted about a bearing 41, such that it may be pivoted out of and into engagement with the roller 15. The doctor blade chamber device 30 is mounted on an arm 42 via a pivotal bearing 43 such that it can be adjusted to the screen roller 29. The mutual swinging of the system may be established by means of a cylinder 44.

20 Fig. 7 shows a further embodiment of a printing unit according to the invention. In this printing unit, there is a simultaneous use of two units 28. In this embodiment, there is not shown an inking unit 24 corresponding to the inking unit 24 in Figs. 2,3 and 4. However, such an inking unit will also form part of this embodiment. The unit 28 illustrated to the right in the Figure, is used for the application of damp. The unit 28
25 illustrated to the left is used for the application of lacquer. As it is possible to divide the doctor blade chamber device across its length, it will be possible to apply lacquer in stripes where the dampening unit does not apply damp. Such an effect will not be possible in traditional printing units. The inking unit and the dampening unit illustrated in Fig. 7 will work according to the same principle as explained above with reference to the preceding Figures.
30

CLAIMS

1. A method of operation of a printing unit in an offset machine characterised in that the printing unit comprising a doctor blade chamber device is used for lacquer application and as dampening unit for water application.

2. A printing unit for use by a method according to claim 1 in an offset machine comprising means for lacquer application and means for water application, characterised in that the lacquer application means and the water application means are comprised of a unit comprising a doctor blade chamber device and at least a roller for transferring lacquer or water from the doctor blade chamber device to the plate cylinder of the printing unit.

3. A printing unit according to claim 2, characterised in that the lacquer and water application means are based on the use of one and the same doctor blade chamber device.

4. A printing unit according to claim 3, characterised in that the lacquer application means comprises only one transfer roller in the form of a screen roller transferring lacquer directly from the doctor blade chamber device to the plate cylinder.

5. A printing unit according to claim 3, characterised in that the water application means comprises transfer rollers in the form of a screen roller and a rubber roller for transferring water from the doctor blade chamber device to the plate cylinder.

6. A printing unit according to any one of the claims 2-5, characterised in that the doctor blade chamber device/transfer roller unit is displaceably mounted relative to the plate cylinder between an engagement position and an idling position.

7. A printing unit according to any one of the claims 2-6, characterised in that the unit is provided with coupling means adapted to be releaseably connected to cou-

pling means in the offset machine, preferably coupling means for a cleaning unit known per se for the plate cylinder.

5 8. A printing unit according to any one of the claims 2-7, characterised in that the transfer roller is driven by its own motor, preferably via a motor controlled by tacho signal from the main machine.

10 9. A printing unit according to any one of the claims 2-8, characterised in that the unit comprising the doctor blade chamber device and at least one roller is replaceably mounted in the offset machine with the existing dampening unit of the offset machine.

15 10. A printing unit according to any one of the claims 2-9, characterised in that the transfer roller which is in contact with the plate cylinder of the printing unit is mounted in the bearing of the offset machine for a conventional transfer cylinder in a dampening unit, and that the plate cylinder simultaneously is in contact with two units comprising a doctor blade chamber device and transfer rollers for application of lacquer and water, respectively, to the plate cylinder.

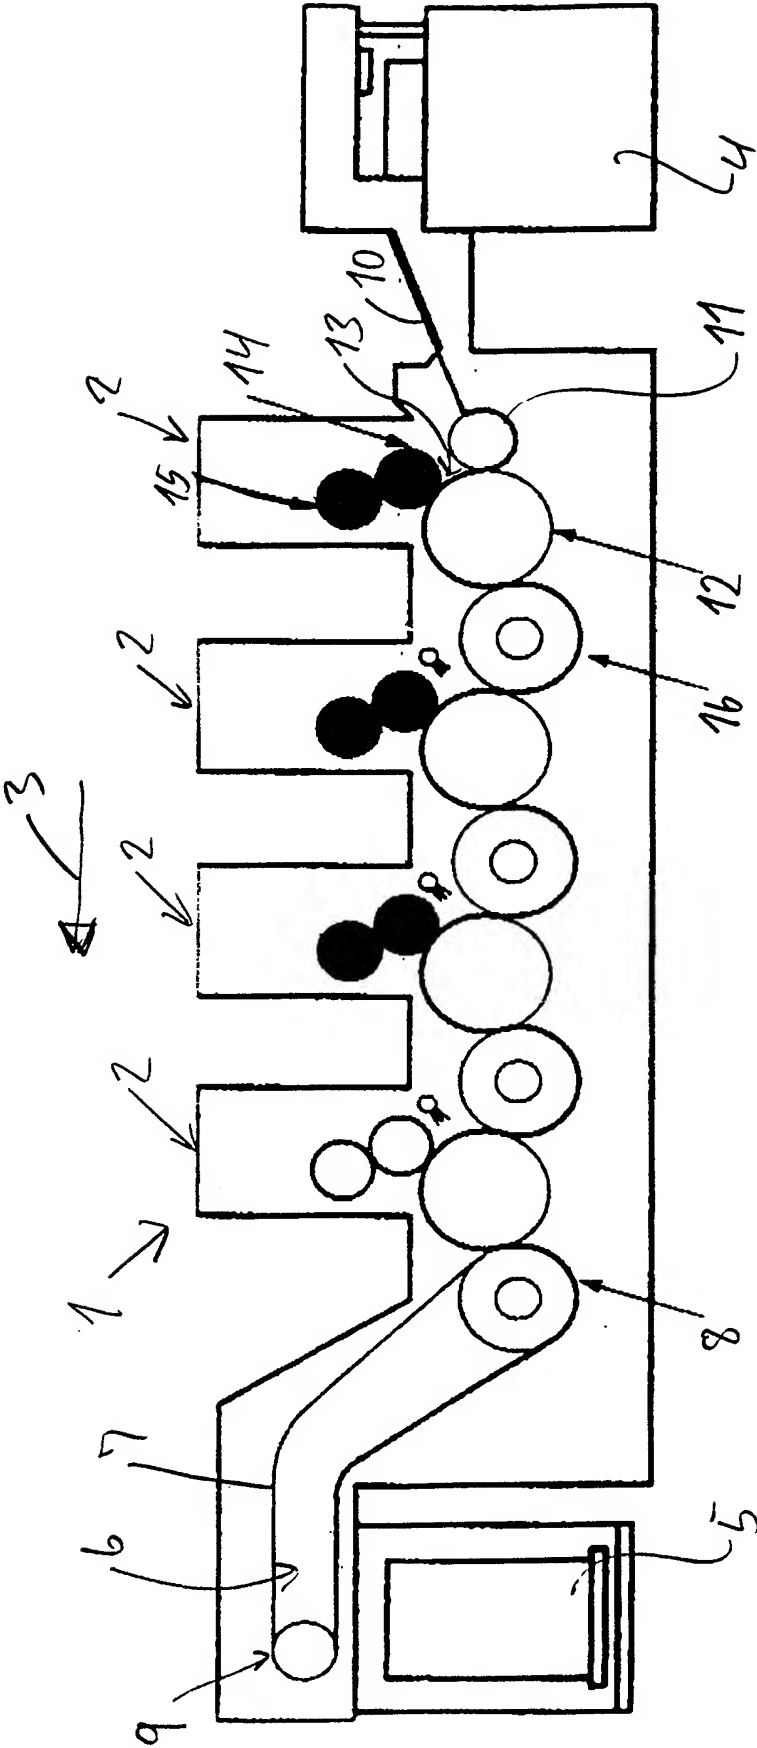


Fig. 1

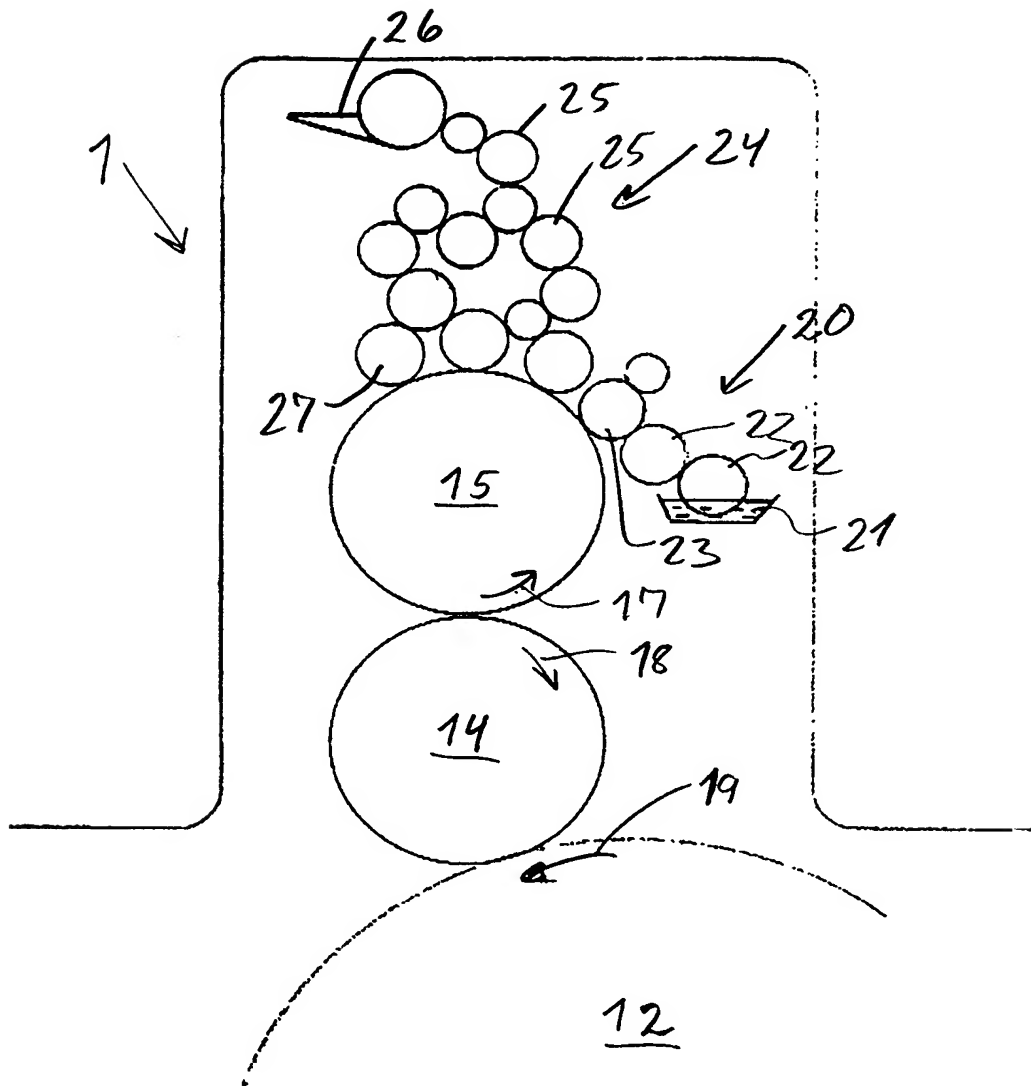


FIG. 2

3/6

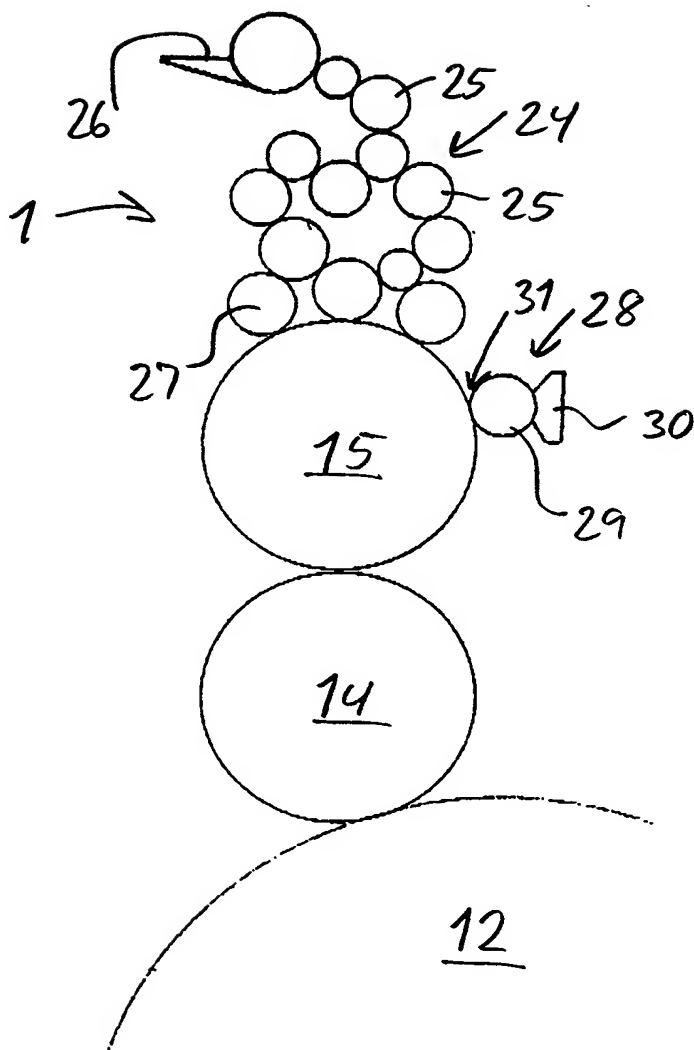


FIG. 3

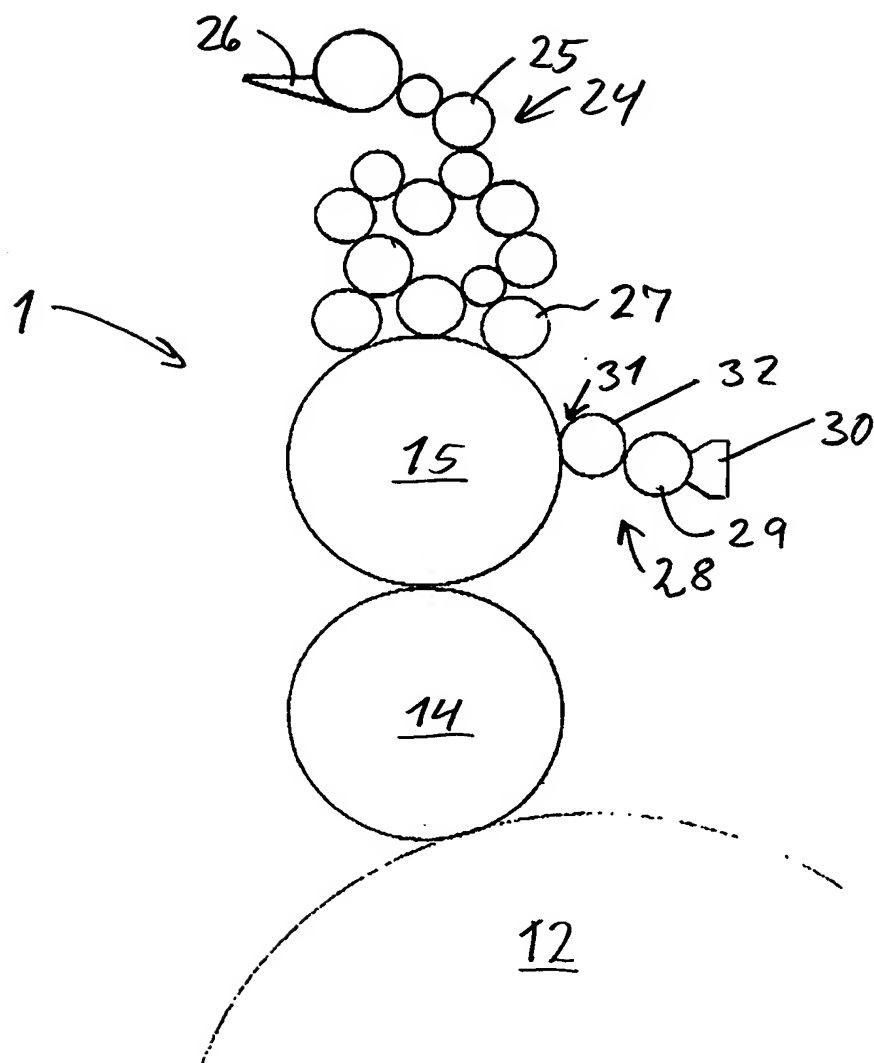


FIG. 4

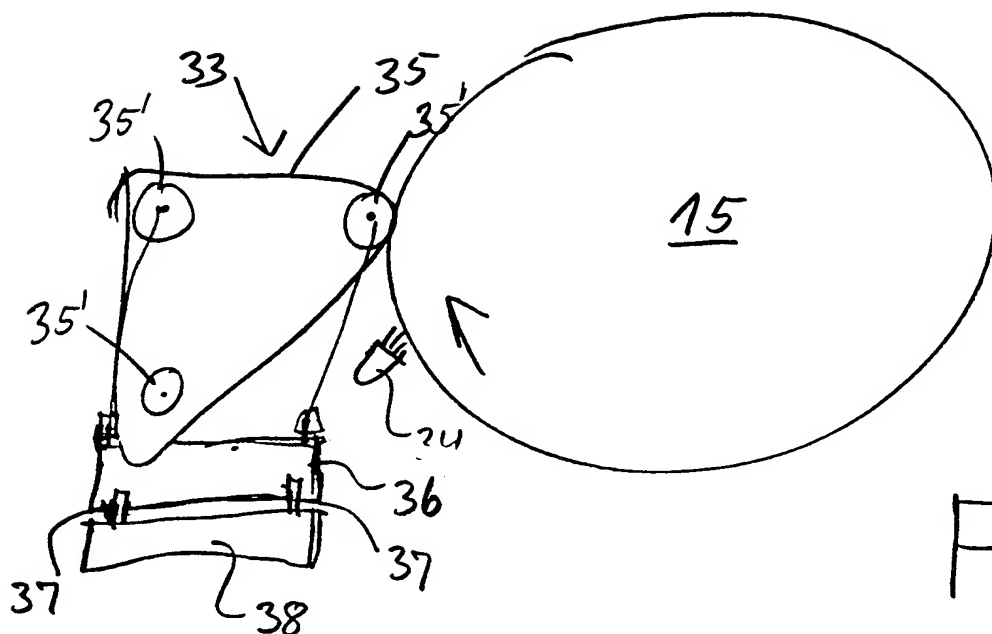


FIG. 5

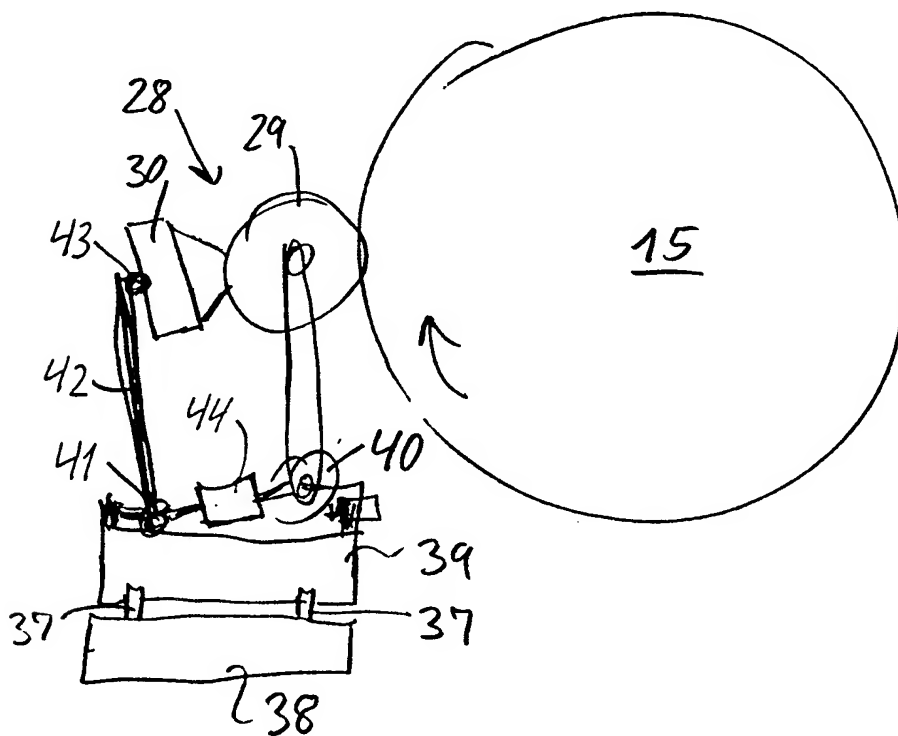


FIG. 6

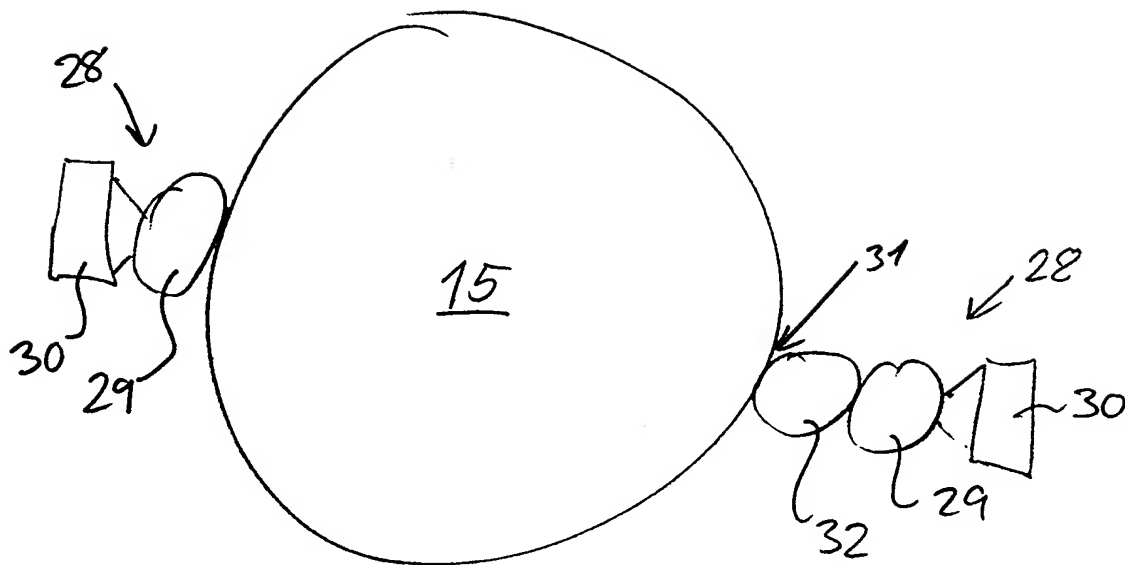


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 98/00303

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: B41F 7/26, B41F 23/08 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: B41F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI, PAJ, EPODOC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2119711 A (VEB KOMBINAT POLYGRAPH"WERNER LAMBERZ"), 23 November 1983 (23.11.83), page 1, line 88 - page 2, line 24, abstract	1-3
A	--	4-10
A	EP 0767058 A2 (DEMOORE, H.W.), 9 April 1997 (09.04.97), column 21, line 18 - line 40, figures 6,14,17, claim 2	1-10
A	EP 0659557 A1 (MAN ROLAND DRUCKMASCHINEN AG), 28 June 1995 (28.06.95), figure 2, claim 1	1-10
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
15 October 1998		21 -10- 1998
Name and mailing address of the ISA: Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Filip von Friesendorff Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 98/00303

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0574124 A1 (DEMOORE, H.W.), 15 December 1993 (15.12.93), column 1, line 9 - line 17; column 8, line 43 - line 55, figures 1,7-9, claim 1 --	1-10
A	EP 0350839 A2 (FISCHER & KRECKE GMBH & CO.), 17 January 1990 (17.01.90), column 5, line 24 - line 43, figures 1-15 --	1-10
A	DE 3500437 A1 (VEB KOMBINAT POLYGRAPH"WERNER LAMBERZ"), 17 October 1985 (17.10.85), abstract, figure --	1-10
A	GB 2184982 A (LUIGI GHISALBERTI), 8 July 1987 (08.07.87), abstract -- -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/07/98

International application No.

PCT/DK 98/00303

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
GB	2119711	A	23/11/83	DE	3305983 A,C	10/11/83
				FR	2526369 A,B	10/11/83
				JP	58191163 A	08/11/83

EP	0767058	A2	09/04/97	JP	9136398 A	27/05/97

EP	0659557	A1	28/06/95	AT	150372 T	15/04/97
				DE	4344084 C	02/03/95
				DE	59402141 D	00/00/00
				JP	7205408 A	08/08/95
				US	5588365 A	31/12/96

EP	0574124	A1	15/12/93	SE	0574124 T3	
				AT	148038 T	15/02/97
				AU	646197 B	10/02/94
				CA	2094694 A	07/11/93
				CN	1030047 B	18/10/95
				CN	1079689 A	22/12/93
				CZ	9300826 A	19/01/94
				DE	69307599 D,T	12/06/97
				DK	574124 T	21/07/97
				JP	2630553 B	16/07/97
				JP	7178361 A	18/07/95
				KR	9612753 B	24/09/96
				US	5207159 A	04/05/93
				US	5335596 A	09/08/94

EP	0350839	A2	17/01/90	DE	3823340 C,R	04/01/90
				JP	2117834 A	02/05/90

DE	3500437	A1	17/10/85	NONE		

GB	2184982	A	08/07/87	DE	3641213 A	11/06/87
				FR	2590842 A	05/06/87

PUB-NO: WO009901282A1
DOCUMENT-IDENTIFIER: WO 9901282 A1
TITLE: METHOD OF OPERATION
OF A PRINTING UNIT
AND PRINTING UNIT
FOR OFFSET MACHINE
PUBN-DATE: January 14, 1999

INVENTOR-INFORMATION:

NAME	COUNTRY
LEIMAND, HENRIK	DK

ASSIGNEE-INFORMATION:

NAME	COUNTRY
TRESU AS	DK
LEIMAND HENRIK	DK

APPL-NO: DK09800303
APPL-DATE: July 2, 1998

PRIORITY-DATA: DK00080097A (July 3,
1997)

INT-CL (IPC): B41F007/26 ,
B41F023/08

EUR-CL (EPC): B41F007/26 ,
B41F023/08

ABSTRACT:

CHG DATE=19990905 STATUS=O>There is disclosed a printing unit (1) for use in an offset machine. The printing unit allows a broader use of offset machines (1). This is achieved in that the lacquer application means and the water application means comprise a unit (28) consisting of a doctor blade chamber device (30) and at least one roller (29, 32) for transferring lacquer or water from the doctor blade chamber device (30) to the plate cylinder (15) of the printing unit.